



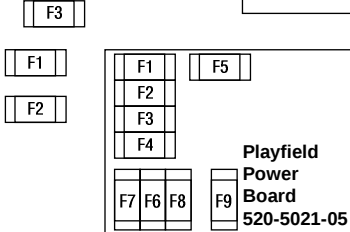

FUSE LIST

Power Supply Board fuses 520-5047-03					CPU Board 520-5003-04	
F1	5V & 12V Logic Power Input	7A, 250V, SB				
F2	5V & 12V Logic Power Input	7A, 250V, SB				
F3	Not used					
F4	18V Controlled lamps	8A, 250V, SB				
F5	34V Solenoids	4A, 250V, SB				
F6	34V Solenoids	5A, 250V, SB				
Back Box fuses						
F1	18VDC Controlled lamps	8A, 250V, SB				
F2	34VDC Solenoids	8A, 250V, SB				
F3	18VDC Display	8A, 250V, SB				
Playfield Power Board fuses 520-5021-05					Sound Board 520-5050-03	
F1	General Illumination (Violet)	5A, 250V, SB				
F2	General Illumination (Green)	5A, 250V, SB				
F3	General Illumination (Yellow)	5A, 250V, SB				
F4	General Illumination (Brown)	5A, 250V, SB				
F5	Flipper Power & 50V coils	5A, 250V, SB				
F6	34V Flashers (Right)	5A, 250V, SB				
F7	34V Coils (Left)	3A, 250V, SB				
F8	50V Coils	4A, 250V, SB				
F9	50V Laser Kick	5A, 250V, SB				
Solid State Flipper Board fuses 520-5076-00						
F1	Coil A (right flipper)	3A, 250V, SB				
F2	Coil (hold power)	3A, 250V, SB				
F3	Coil B (lower left flipper)	3A, 250V, SB				
F4	Coil (hold power)	3A, 250V, SB				
F5	Coil C (upper right flipper)	3A, 250V, SB				